

Frameless Loudspeakers



SC-622f

6-1/2" In-Ceiling / Wall Loudspeaker

2-way Single Point Stereo

Frequency Response: 45Hz - 20kHz ± 3 dB

Power Handling: 50 watts nom. 100 max. (both channels)

Sensitivity: 91dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: Dual (L+R) 3/4" dome tweeters


Cut-out dimensions: 7-1/4" dia. x 3-5/16" deep

Overall dimensions: 8-7/16" dia.

Sold and shipped Individually

Features:

- Kevlar® woofer with butyl rubber surround
- Proven dog ear mounting system
- Micro-perf grille may be painted to match mounting surface

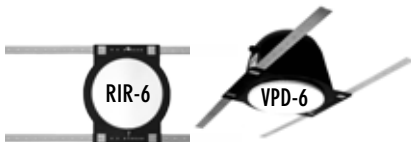

for SC-622f



for SC-822f

Optional Pre-Construction Brackets & Vapor Domes

SC-822f

8" In-Ceiling / Wall Loudspeaker

2-way Single Point Stereo

Frequency Response: 35Hz - 20kHz ± 3 dB

Power Handling: 60 watts nom. 120 max. (both channels)

Sensitivity: 91dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: Dual (L+R) 3/4" dome tweeters

Cut-out dimensions: 8-5/8" dia. x 3-7/8" deep

Overall dimensions: 9-7/8" dia.

Sold and shipped Individually



Side-View of Frameless Grille

Optional Square Frameless Grilles

MGS-6f for SC-622f

MGS-8f for SC-822f



Rev. C

