

ArchiTECH

Premium Series®



SE-691E
5-1/4" In-Wall
2-way Loudspeaker

SE-791E
6-1/2" In-Wall
2-way Loudspeaker

SE-891E
8" In-Wall
2-way Loudspeaker

	SE-691E	SE-791E	SE-891E	
Poly Woofer with Butyl Rubber Surround	5-1/4"	6-1/2"	8"	Woofer Size
Silk, Soft-Dome, Pivoting Tweeter	1"	1"	1"	
Frequency Response	50 - 20K	45 - 20K	35 - 20K	Hz ± 3 dB
Power Handling	30 / 60	40 / 80	60 / 120	watts nom. / max.
Sensitivity	91	91	91	dB 1 watt / 1 meter
Impedance	8	8	8	ohms
Overall Dimensions	6-5/8" x 9-1/4"	8-5/8" x 12-1/8"	10-1/2" x 14-1/2"	Width x Height
Cut-Out Dimensions	5-9/16" x 8-1/4"	7-3/8" x 10-7/8"	9" x 13"	Width x Height
Loudspeaker Depth	2-3/8"	3-1/8"	2-15/16"	


Features:

- Industry leading superior clamp-ring mounting system
- Frame and Grilles may be painted to match mounting surface
- Sold and shipped in pairs

Additional SE-791E & SE-891E Features:

- IR Knockout
- Poly-switch overdrive protection
- 12 dB/octave crossover

Optional Pre-Construction Brackets:

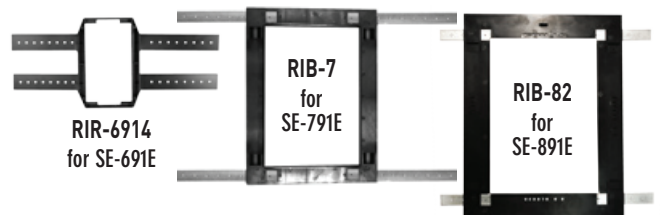

Supplied with grille, baffle & frame



Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

View all our
ArchiTech Premium
Models:

