


Endeavor[®]

IO-505, 605, 805

2-way Cabinet Indoor / Outdoor Loudspeaker



SPECIFICATIONS

	IO-505	IO-605	IO-805	
Dupont® Kevlar woofer with butyl rubber surround	5-1/4"	6-1/2"	8"	Woofer Size
Tetoron® soft dome pivoting tweeter	1"	1"	1"	Tweeter Size
Frequency Response:	40 - 21K	38 - 21K	35 - 21K	Hz
Power Handling:	50 / 100	60 / 120	70 / 140	watts nom. / max.
Sensitivity:	87	88	89	dB 1 watt / 1 meter
Impedance:	8	8	8	ohms
Available in White & Black  Paintable Enclosures	✓	✓	Black Only	
Rust-proof Perforated Aluminum Grille which is epoxy painted for long life in high humidity and salt air environments	✓	✓	✓	
Sold and Shipped in Pairs	✓	✓	✓	
Individual Net Weight with U-Bracket	5.7	8.1	11.15	lbs



FEATURES


Sealed system design (no port) prevents bugs and moisture from entering cabinet.

Indoor / outdoor bass equalization on select models.

Versatile mounting options, includes standard type "U" bracket and mounting bosses on rear for optional double-swivel mounting brackets.

Suitable for use on bookshelves with bracket-less finished look.

Flex-Cap Design



notched & solid end-caps enable U-Bracket mounting or bookshelf format

DIMENSIONS

IO-505: Enclosure 7-1/4" W x 10" H x 7-1/2" D mounting bracket increases depth 3/4"

IO-605: Enclosure 8-3/4" W x 11-3/8" H x 8-5/8" D mounting bracket increases depth 1"

IO-805: Enclosure 10-5/8" W x 13-3/4" H x 10-5/8" D mounting bracket increases depth 1-1/4"



Elegant cover conceals and protects connection terminals



Bookshelf Configuration



rear mounted using SE-DBLSVL **Swivel Bracket** (not included)



Shown with the **U-Bracket** (included)

Rev. C



OEM SYSTEMS COMPANY
 (775) 355-0405 ♦ (800) 291-0561 FAX
 www.oemsystems.com ♦ info@oemsystems.com

View the entire Endeavor Product Line:




Endeavor[®]

IO-510


2-way Cabinet Indoor / Outdoor Loudspeaker

IO-570 70-100 Volt / 8 ohms

COMMERCIAL - Indoor / Outdoor Loudspeaker

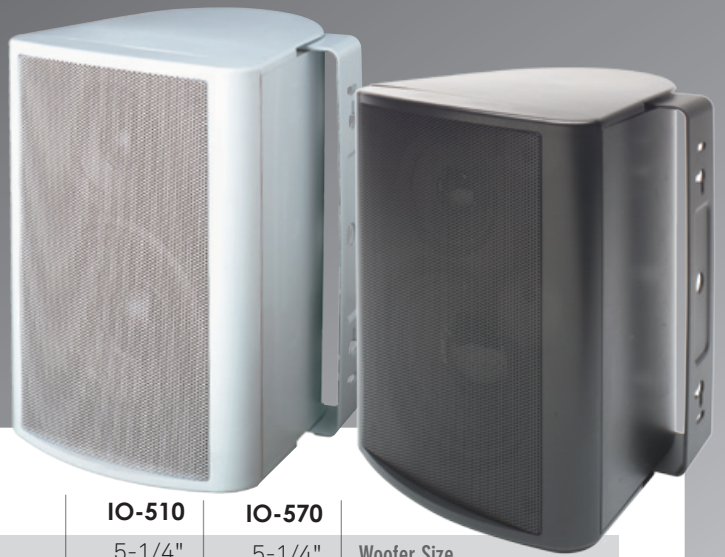

SPECIFICATIONS

	IO-510	IO-570	
Polypropylene woofer with butyl rubber surround	5-1/4"	5-1/4"	Woofer Size
Mylar soft dome pivoting tweeter	1"	1"	Tweeter Size
Frequency Response:	42 - 21K	42 - 21K	Hz
Power Handling:	50 / 100	50 / 100	watts nom. / max.
Sensitivity:	90	90	dB 1 watt / 1 meter
Impedance:	8	8*	ohms
Available in White & Black  Paintable Enclosures	✓	✓	
Rust-proof Perforated Aluminum Grille which is epoxy painted for long life in high humidity and salt air environments	✓	✓	
Sold and Shipped in Pairs	✓		
Individual Net Weight with U-Bracket	5.25	6.6	lbs



* In 8-ohm position

FEATURES

Sealed system design (no port) prevents bugs and moisture from entering cabinet.

Versatile mounting options, includes standard type "U" bracket and mounting bosses on rear for optional double-swivel mounting brackets

DIMENSIONS

IO-510: Enclosure 7-1/4" W x 10" H x 7-1/2" D mounting bracket increases depth 3/4"

IO-570: Enclosure 7-1/4" W x 10" H x 7-1/2" D mounting bracket increases depth 3/4"



Elegant cover conceals and protects connection terminals



The IO-510 & 570 are sold and shipped with **U-Bracket** and **Notched End-Cap**



Front mounted 70-100 Volt tap selector switch with bypass setting for 8-ohm applications
Tap Selection Settings: 2, 4, 8, 16, 32W (70V) & 4, 8, 16, 32W (100V)



Rev. C



OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

View the entire
Endeavor
Product Line:

