

Presence®

LOUDSPEAKERS FOR TODAY'S ARCHITECTURE



A-505

5-1/4" In-Ceiling
2-way Loudspeaker

A-606

6-1/2" In-Ceiling
2-way Loudspeaker

A-808


8" In-Ceiling
2-way Loudspeaker

	A-505	A-606	A-808	
Woven Kevlar® Woofer with Butyl Rubber Surround	5-1/4"	6-1/2"	8"	Woofer Size
Silk, Soft-Dome, Pivoting Tweeter	3/4"	1"	1"	
Frequency Response	50 - 20K	45 - 20K	35 - 20K	Hz ± 3 dB
Power Handling	40 / 80	50 / 100	60 / 120	watts nom. / max.
Sensitivity	91	91	91	dB 1 watt / 1 meter
Impedance	8	8	8	ohms
Overall Dimensions	7-1/2"	8-3/8"	9-3/4"	Diameter
Cut-Out Dimensions	6-1/2"	7-3/8"	8-5/8"	Diameter
Loudspeaker Depth	2-3/8"	2-7/8"	3-3/8"	

Features:

- High-temperature Polyimide voice coils
- High-grade crossovers
- Polyswitch overdrive protection
- Proven mounting system
- Frame and Grille may be painted to match mounting surface
- Sold and Shipped in Pairs

Optional Pre-Construction Brackets

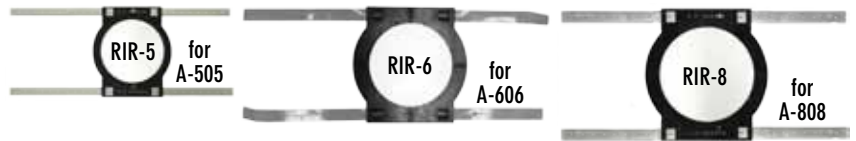

Supplied with grille, baffle & frame

Welcome Home



OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com

View all our
Presence
Models:

