


Presence[®] Elite

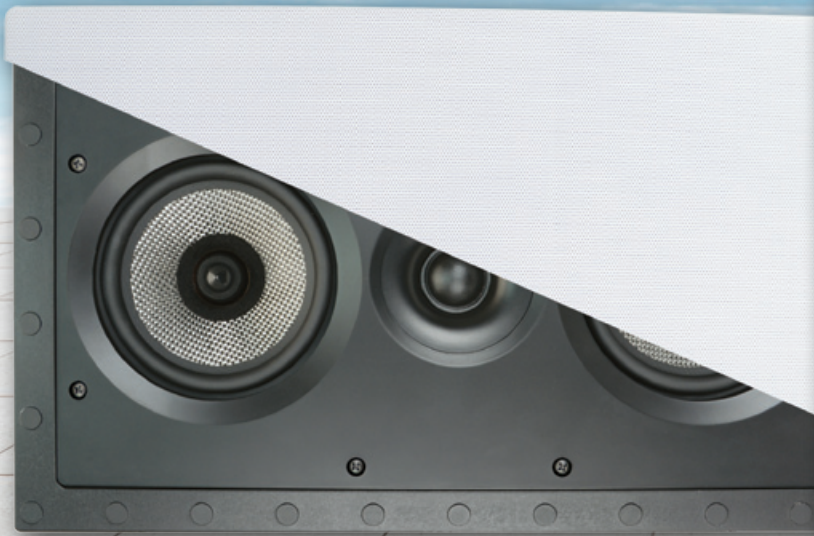

Frameless Loudspeakers

PE-5LCRSf

Dual 5-1/4" 2-way In-Wall LCRS Loudspeaker

Specifications

Frequency Response: 55Hz - 21kHz \pm 3 dB

Power Handling: 50 watts nom. 100 max.

Sensitivity: 87dB 2.83 V / 1 meter

Impedance: 6 ohms nominal

Tweeter: 1" Pivoting silk dome tweeter

Cut-out dimensions: 7-15/16" W x 14-7/16" H x 3-1/8" Deep


Overall dimensions: 9" W x 15-3/4" H

Sold and Shipped Individually




Features:

- Woven glass fiber woofers with butyl rubber surrounds
- High temperature polyimide voice coils
- Super slim 3mm all-weather frameless grille
- Industry leading superior clamp-ring mounting system
- Orient Vertically or Horizontally
- Gold-plated high tension terminals fit up to 5-gauge wire
- High quality multi-order crossover

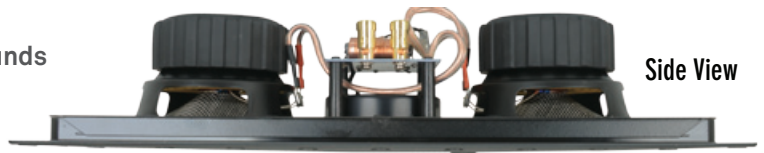

Side View

Optional Pre-Construction Bracket

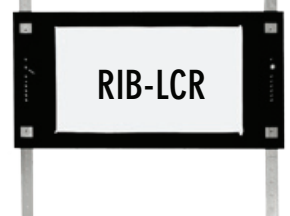

Rev. C

OEM SYSTEMS COMPANY
(775) 355-0405 ♦ (800) 291-0561 FAX
www.oemsystems.com ♦ info@oemsystems.com