

# Presence<sup>®</sup> Elite



## Frameless Single-Point Loudspeakers



### PE-622f

6-1/2" In-Ceiling / Wall Loudspeaker

6-1/2" 2-way Single-Point Stereo Loudspeaker

Frequency Response: 62Hz - 25kHz ± 3 dB

Power Handling: 50 watts nom. 100 max combined

Sensitivity: 87 dB 2.83 V / 1 meter

Impedance: 8 ohms nominal (per channel)

Tweeter: Dual 3/4" silk dome tweeters


Cut-out dimensions: 7-1/4" Dia. x 3-3/4" Deep

Overall dimensions: 8-7/16" Diameter

*Sold and shipped in individually*

#### Features:

- One speaker combines both left and right channels
- Woven glass fiber woofer with butyl rubber surround
- Load balancing toggle mounting system
- Super slim 3mm all-weather frameless grille

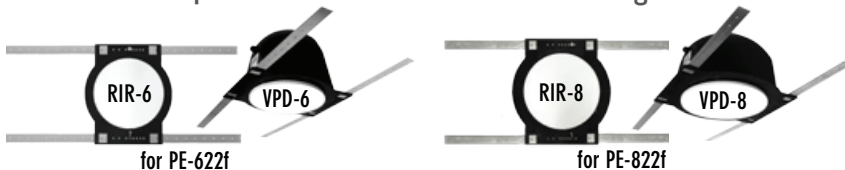

Optional Pre-Construction Brackets & Vapor Domes

### PE-822f

8" In-Ceiling / Wall Loudspeaker

8" 2-way Single-Point Stereo Loudspeaker

Frequency Response: 55Hz - 25kHz ± 3 dB

Power Handling: 60 watts nom. 120 max.

Sensitivity: 87dB 2.83 V / 1 meter

Impedance: 8 ohms nominal (per channel)

Tweeter: Dual 3/4" silk dome tweeters

Cut-out dimensions: 8-5/8" Dia. x 4" Deep

Overall dimensions: 9-7/8" Diameter

*Sold and shipped individually*



Side-View

#### Optional Square Frameless Grilles

MGS-6f for PE-622f    MGS-8f for PE-822f



Rev. C

OEM SYSTEMS COMPANY

(775) 355-0405 ♦ (800) 291-0561 FAX

www.oemsystems.com ♦ info@oemsystems.com