

W
I
A

IW-2BG



2 Gold Plated Banana Jacks accept single Banana Plugs or Dual Banana Plugs.

W
I
A

IW-4BG



4 Gold Plated Banana Jacks accept single Banana Plugs or Dual Banana Plugs.

W
I
A

IW-8BG



8 Gold Plated Banana Jacks accept single Banana Plugs or Dual Banana Plugs.

W
I
A

IW-2BPG



2 Gold Plated 5-way Binding Posts accept Banana Plugs, Dual Banana Plugs, Spade Lugs, Pins, or Bare Wires.

W
I
A

IW-4BPG



4 Gold Plated 5-way Binding Posts accept Banana Plugs, Dual Banana Plugs, Spade Lugs, Pins, or Bare Wires.

W
I
A

IW-8BPG



8 Gold Plated 5-way Binding Posts accept Banana Plugs, Dual Banana Plugs, Spade Lugs, Pins, or Bare Wires.

W
A

IW-1RG



1 Gold Plated RCA Jack. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
A

IW-2RG



2 Gold Plated RCA Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
I

IW-3RG



3 Gold Plated RCA Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
I

IW-4RG



4 Gold Plated RCA Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
I

IW-2R1FG



2 Gold Plated RCA Jacks and 1 Coaxial Jack with threaded. front & back. Will install in standard "J" box.

W
I

IW-3R1FG



3 Gold Plated RCA Jacks and 1 Coaxial Jack with threaded. front & back. Will install in standard "J" box.

W
I

IW-1FG



1 Gold Plated Coaxial Jack. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
I

IW-2FG



2 Gold Plated Coaxial Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
I

IW-3FG



3 Gold Plated Coaxial Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

W
I

IW-4FG



4 Gold Plated Coaxial Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

LL-SO - Large Lid Storage Organizer



Carrying Case designed for modular wall plate components and other accessories. Multi-compartment with dual chambers. Plates fit in lower chamber while modular connectors fit in upper chamber.



w
i
a

IW-2BG


2 Gold Plated Banana Jacks accept single Banana Plugs or Dual Banana Plugs.



w
i
a

IW-4BG

4 Gold Plated Banana Jacks accept single Banana Plugs or Dual Banana Plugs.

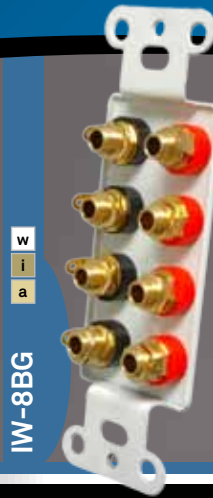

w
i
a

IW-8BG


8 Gold Plated Banana Jacks accept single Banana Plugs or Dual Banana Plugs.



w
i
a

IW-2BPG


2 Gold Plated 5-way Binding Posts accept Banana Plugs, Dual Banana Plugs, Spade Lugs, Pinas, or Bare Wires.

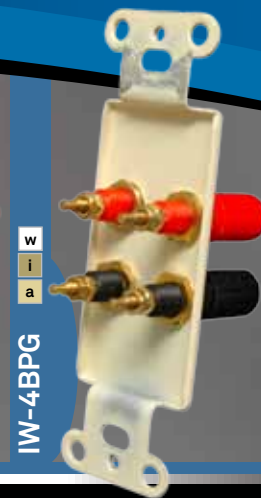

w
i
a

IW-4BPG


4 Gold Plated 5-way Binding Posts accept Banana Plugs, Dual Banana Plugs, Spade Lugs, Pins, or Bare Wires.

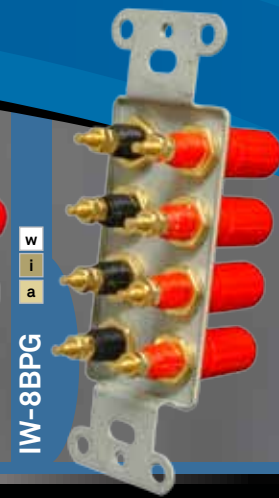

w
i
a

IW-8BPG

8 Gold Plated 5-way Binding Posts accept Banana Plugs, Dual Banana Plugs, Spade Lugs, Pins, or Bare Wires.

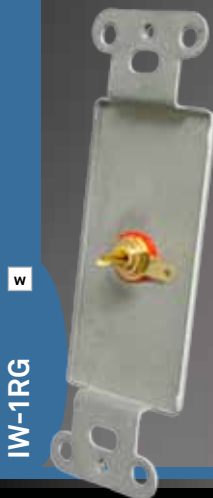

w

IW-1RG


1 Gold Plated RCA Jack. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



w
a

IW-2RG

2 Gold Plated RCA Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.

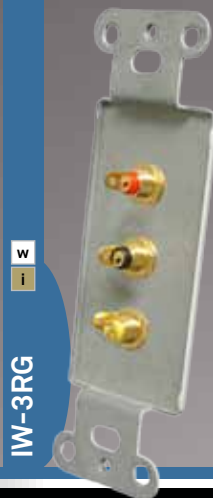

w
i

IW-3RG

3 Gold Plated RCA Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



w
i

IW-4RG


4 Gold Plated RCA Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



w
i

IW-2R1FG

2 Gold Plated RCA Jacks and 1 Coaxial Jack with threaded. Will install in standard "J" box.

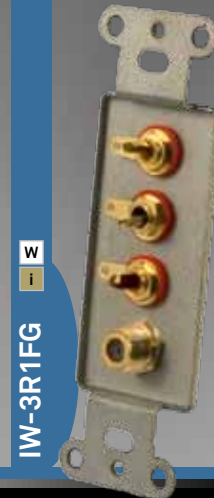

w
i

IW-3R1FG

3 Gold Plated RCA Jacks and 1 Coaxial Jack with threaded. Will install in standard "J" box.



w

IW-1FG

1 Gold Plated Coaxial Jack. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



w
i

IW-2FG

2 Gold Plated Coaxial Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



w
i

IW-3FG

3 Gold Plated Coaxial Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



w
i

IW-4FG

4 Gold Plated Coaxial Jacks. Will install in standard "J" box. Wiring should be RG-59U or similar shielded coax.



MP-8 - Media Panel

The MP-8 In-Wall Media Panel adds flexibility and ease of installation to any media system job. Requiring only an 8" x 11 3/4" opening, the MP-8 mounts with just 4 screws using our 6-1/2" speaker frame and steel clamp ring (all included).