

Sound Terrain®

RS-6 & RS-62

6" High Performance
Rock Speakers with 2-way
weatherproof design

Available in:

Granite Gray

RS-6G

RS-62G

Desert Brown

RS-6B

RS-62B



Granite Gray



Desert Brown

RS-6 Specifications:

Woofers:	6" Poly Woofer with butyl surround
Tweeter:	1" Dome Tweeter
Impedance:	6 ohms nominal
Baffle / Grille:	Sloped Front Baffle with Textured Aluminum Grille
Power Handling:	40 watts nominal 80 max.
Sensitivity:	92dB 2.83V / 1 meter
Frequency Response:	75 Hz - 21,000 Hz
Weight:	Sold and Shipped in Pairs - 16 lbs. / pair
Dimensions:	10 1/2" wide at base x 8-1/2" deep at base x 8-3/4" high

RS-62 Dual Channel (Single Point) Specifications:


Woofers:	6" Poly Woofer with butyl surround
Tweeter:	2 (left + right) 3/4" dome tweeters
Impedance:	6 ohms nominal
Baffle / Grille:	Sloped Front Baffle with Textured Aluminum Grille
Power Handling:	40 watts nominal 80 max.
Sensitivity:	89dB 2.83V / 1 meter (each channel) (92dB combined)
Frequency Response:	75 Hz - 21,000 Hz
Weight:	Sold and Shipped Individually - 8 lbs. / each
Dimensions:	10 1/2" wide at base x 8" deep at base x 8 1/2" high



RS-6

Single Channel (8 ohm) Connection


Requires two speakers for stereo reproduction (one for left channel and one for right).

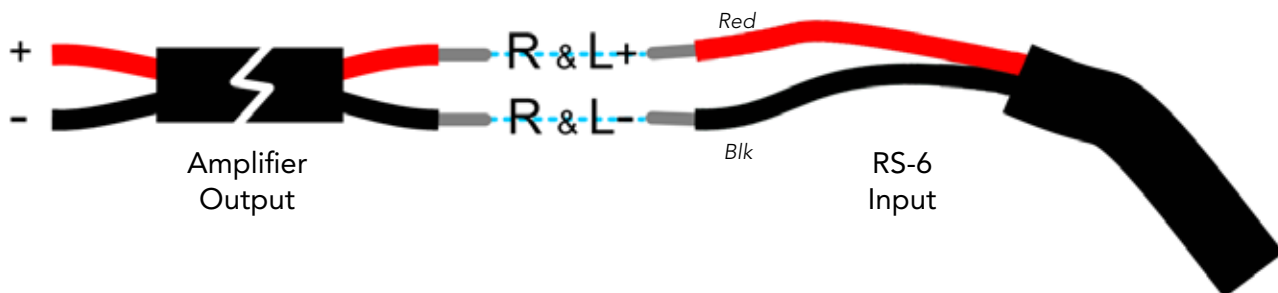

RS-62

Dual Channel (Stereo) Connection

Requires only one speaker since both channels are combined within the speaker.

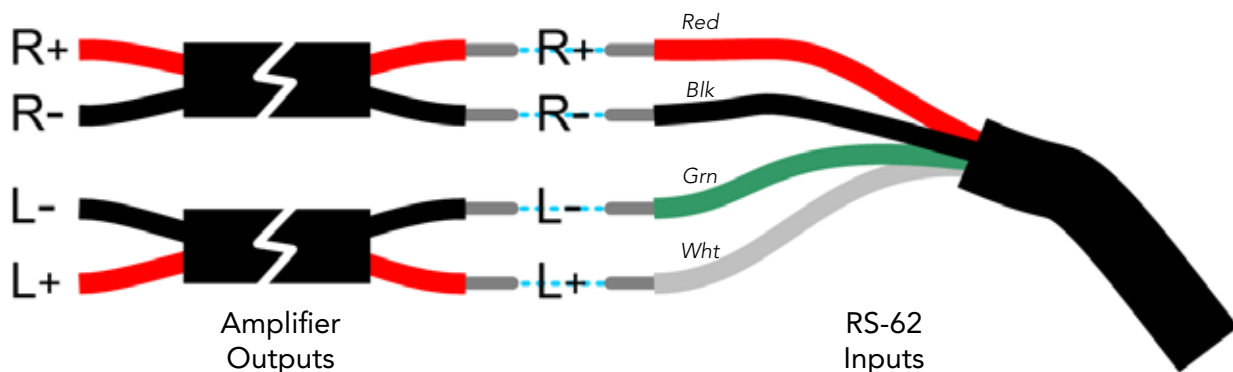

Precautions:

DO NOT bury the speaker so that the grille becomes partially covered. It is best to leave at least 1 inch of space between the top of the ground cover and the bottom of the grille.

Avoid placing the speakers where the grille will receive direct water spray.

